


PA 重型管

PA Heavy Weight Conduit

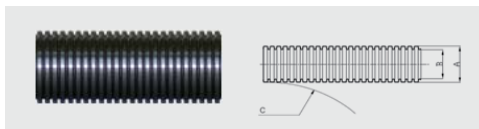

CE UL测试 DB EN45545

已通过铁道客车 67 号文件测试

材质：尼龙 6

颜色：黑色 / 灰色

温度：-40°C ~ +120°C，短时间 150°C

防护等级：IP66, IP68(与接头及密封圈配合使用)

特性：柔韧性好，阻燃，低烟雾，低毒，无卤素，很好的抗疲劳性和抗紫外辐射性，自熄灭性好

应用：机床，机械制造，自动化设备，船舶设施，运输装置，空气调节装置，轨道交通，铁路设施等

Material: Polyamide 6

Colour: Black(BL)/Grey(GR)

Temperature range: -40°C ~ +120°C, short-term to 150°C

Protection Degree: IP66, IP68(For use with RL fitting & seal)

Properties: High flexibility, fire hazard, low smoke density, low toxicity, halogen free, high UV resistance and high fatigue life, self-extinguishing

Applications: Machine tool, mechanical building, auto equipment, shipping facilities, transport installation, air-condition equipment, rail transportation, railway etc

软管尺寸 Conduit size	型号 Part no.	铁路专属型号① Special no.	外径 A (mm) OD	内径 B (mm) ID	最小弯曲半径 C (mm) Min bend radius	包装 (米 / 卷) Packing
10	PAH-10	HPA6-7	10.1	6.6	15	200
13	PAH-13	HPA6-10	13.0	10.2	25	100
16	PAH-16	HPA6-12	15.8	12.0	35	50
21	PAH-21	HPA6-17	21.2	17.6	45	50
28	PAH-28/C	HPA6-23	28.5	23.7	50	50
34	PAH-34/C	HPA6-29	34.5	29.0	60	50
42	PAH-42	HPA6-36	42.5	35.7	65	25
54	PAH-54	HPA6-48	54.5	48.0	75	25

备注 1：铁路专属型号①为铁道客车，其他客车车辆，动车组及特种车辆专属型号。

Note 1: Railway special model number is for railway passenger cars, other passenger vehicles, motor trains unit and special vehicle exclusive models

备注 2：轨道交通行业建议使用粗螺纹。

Note2: Coarse pitch is recommended to be applied to rail transit industry.