


PA 轻型管

PA Light Weight Conduit

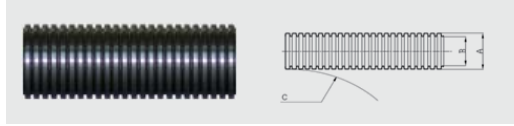

CE UL测试 EN45545

材质：尼龙 6

颜色：黑色 / 灰色

温度：-40°C~+120°C，短时间 150°C

防护等级：IP66, IP68(与接头及密封圈配合使用)

特性：柔韧性好，阻燃，低烟雾，低毒，无卤素，很好的抗疲劳性和抗紫外辐射性，自熄灭性好

应用：机床，机械制造，自动化设备，电气控制系统，船舶设施等

Material: Polyamide 6

Colour: Black(BL)/Grey(GR)

Temperature range: -40°C ~ +120°C, short-term to 150°C

Protection Degree: IP66, IP68(For use with RL fitting & seal)

Properties: High flexibility, fire hazard, low smoke density, low toxicity, halogen free, high UV resistance and high fatigue life, self-extinguishing

Applications: Machine tool, mechanical building, auto equipment, electric control system, shipping facilities etc

软管尺寸 Conduit size	型号 Part no.	外径 A (mm) OD	内径 B (mm) ID	最小弯曲半径 C (mm) Min bend radius	包装 (米 / 卷) Packing
13	PAL-13	13.0	10.2	25	100
16	PAL-16	15.8	12.0	35	50
17	PAL-17	17.0	13.4	35	50
18	PAL-18	18.5	14.7	40	50
21	PAL-21	21.2	17.6	45	50
26	PAL-26	26.0	21.7	50	50
28	PAL-28/F	28.5	23.7	50	50
28	PAL-28/C	28.5	22.6	50	50
34	PAL-34/F	34.5	29.0	60	50
34	PAL-34/C	34.5	29.0	60	50
42	PAL-42	42.5	35.7	65	25
54	PAL-54	54.5	48.0	75	25

PA 轻型开口管

PA Light Weight Slit Conduit



CE UL测试 EN45545

材质：尼龙 6

颜色：黑色 / 灰色

温度：-40°C~+120°C，短时间 150°C

特性：柔韧性好，耐磨损，阻燃，低烟毒，低毒，无卤素很好的抗疲劳性和抗紫外辐射性

应用：机床，机械制造，自动化设备，船舶设施，运输装置，空气调节装置，铁路设施等

Material: Polyamide 6

Colour: Black(BL)/Grey(GR)

Temperature range: -40°C ~ +120°C, short-term to 150°C

Properties: High flexibility, high abrasion resistance, fire hazard, low smoke density, low toxicity, halogen free, high UV resistance and high fatigue life

Applications: Machine tool, mechanical building, auto equipment, shipping facilities, transport installation, air-condition equipment, railway etc

软管尺寸 Conduit size	型号 Part no.	外径 A (mm) OD	内径 B (mm) ID	最小弯曲半径 C (mm) Min bend radius	包装 (米 / 卷) Packing
10	PAL-10-S	10.1	6.6	15	200
13	PAL-13-S	13.0	10.2	25	100
16	PAL-16-S	15.8	12.0	35	50
21	PAL-21-S	21.2	17.6	45	50
28	PAL-28/F-S	28.5	23.7	50	50
34	PAL-34/F-S	34.5	29.0	60	50
42	PAL-42-S	42.5	35.7	65	25
54	PAL-54-S	54.5	48.0	75	25