


密封式线槽 Wiring Duct



H (mm)	W (mm)	型号 Part no.	包装 (米 / 箱) Packing
25	25	WDB-2525	100
30	20	WDB-3020	100
	25	WDB-3025	100
	30	WDB-3030	100
	35	WDB-3035	100
35	35	WDB-3535	100
40	25	WDB-4025	100
	40	WDB-4040	80
	60	WDB-4060	64
50	25	WDB-5025	100
	35	WDB-5035	100
	45	WDB-5045	80
	50	WDB-5050	80
	60	WDB-5060	64
60	80	WDB-5080	48
	40	WDB-6040	64
	60	WDB-6060	48
	80	WDB-6080	36
65	33	WDB-6533	80
	45	WDB-6545	80
	65	WDB-6565	48
80	25	WDB-8025	60
	35	WDB-8035	60
	40	WDB-8040	48
	45	WDB-8045	48
	50	WDB-8050	48
	60	WDB-8060	36
	80	WDB-8080	36
	100	WDB-80100	24
100	120	WDB-80120	24
	35	WDB-10035	48
	40	WDB-10040	48
	50	WDB-10050	48
	60	WDB-10060	36
	80	WDB-10080	24
130	100	WDB-100100	24
	120	WDB-100120	24
	140	WDB-100140	24
	100	WDB-130100	24
150	100	WDB-150100	16

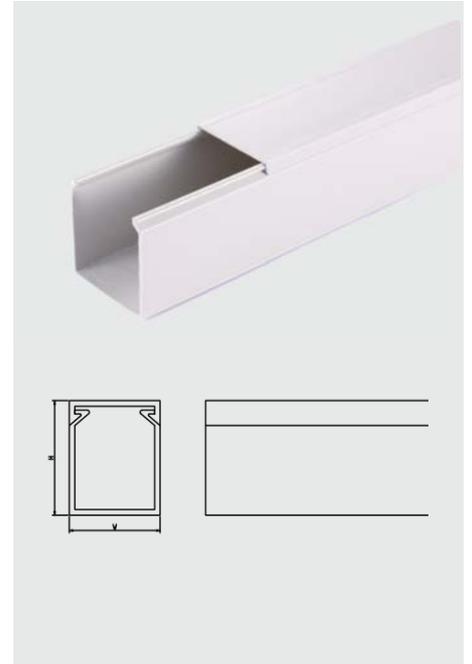

材质：硬质 PVC, 低烟阻燃不含铅, 绝缘性好

Material: Hard PVC, Insulation

颜色：灰色 (白色、蓝色、黑色等可特殊定制)

Colour: Grey (White, Blue and Black colors are available)

温度：-40°C~+70°C

Temperature range: -40°C~+70°C

阻燃等级：UL94-V0

Flame-retardant: UL94-V0

特性：密封式绝缘线槽，专为防尘防鼠设计，符合 RoHS 指令。

Properties: Protect from dust and rat bite, has railway department and UL approval, command (RoHS) satisfy.