


SPUL 平包塑金属软管

SPUL Liquid-tight metal conduits

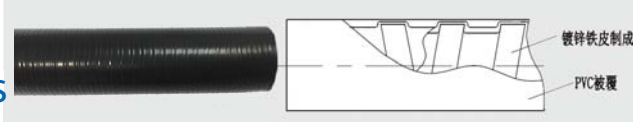

材质：镀锌铁皮（单扣、双扣），外 PVC 被覆

颜色：黑色 / 灰色

温度：-40°C~+80°C, 短时间 100°C

阻燃等级：UL94-V0

防护等级：IP68

特性：具高抗拉、抗破坏性强、抗疲劳性能高、耐高温、耐腐蚀强及良好的防水性能等特点。

应用：铁路，机车，交通系统工程，空调。各种机床，机械，自动控制设备，发电厂。石油，化工。输电能，通讯系统，基地台架式，船舶，大厦，厂房内及屋外露出部分之配线保护。

Material: Galvanized steel strip(square locked & inter locked), PVC sheath
Colour: Black/Grey

Temperature range: -40°C~+80°C,short-term to 100°C

Flame-retardant: UL94-V0

Protection Degree: IP68

Properties: Offer superior tensile resistant, vandalism resistant, high fatigue life, wide temperature tolerances, corrosion resistant and excellent water proof etc.

Applications: Railway, vehicle, traffic system project air-condition. Various machine tool and machines. Automatic control equipment, electric power plants. Petroleum, chemical industry, transmission and distribution system, communication system, base station span. Cable protection in ships, buildings and plants.

单扣 Square locked

软管尺寸 Conduit size	型号 Part no.	外径 OD (mm)		内径 ID (mm)		包装 (米 / 卷) Packing
		最小 Min	最大 Max	最小 Min	最大 Max	
3/8"	SPUL-16	17.50	18.00	12.29	12.80	50
1/2"	SPUL-20	20.80	21.30	15.80	16.31	50
3/4"	SPUL-25	25.20	26.70	20.83	21.34	50
1"	SPUL-32	32.80	33.40	26.44	27.08	30
1 1/4"	SPUL-40	41.40	42.20	35.05	35.81	30

双扣 Inter locked

软管尺寸 Conduit size	型号 Part no.	外径 OD (mm)		内径 ID (mm)		包装 (米 / 卷) Packing
		最小 Min	最大 Max	最小 Min	最大 Max	
1 1/2"	SPUL-45	47.40	48.30	40.01	40.64	20
2"	SPUL-57	59.40	60.30	51.31	51.94	10
2 1/2"	SPUL-70	72.10	73.00	62.99	63.63	10
3"	SPUL-85	87.90	88.90	77.98	78.74	5
4"	SPUL-110	113.3	114.3	101.6	102.6	5

如需其他非标产品请与我们联系。

Other technical data on request.