

79/80


双锁紧金属电缆防水接头 Double Lock Metal Cable Gland

主体材质：黄铜镀镍
Body Material: Nickel-plated brass

密封圈材质：尼龙 66
Sealing Material: Nylon 66

温度：-40°C ~ +100°C，短时间 120°C
Temperature range: -40°C ~ +100°C, short-term to 120°C

防护等级：IP68(使用 O 型圈的情况下)
Protection Degree: IP68(Using O-sealing)

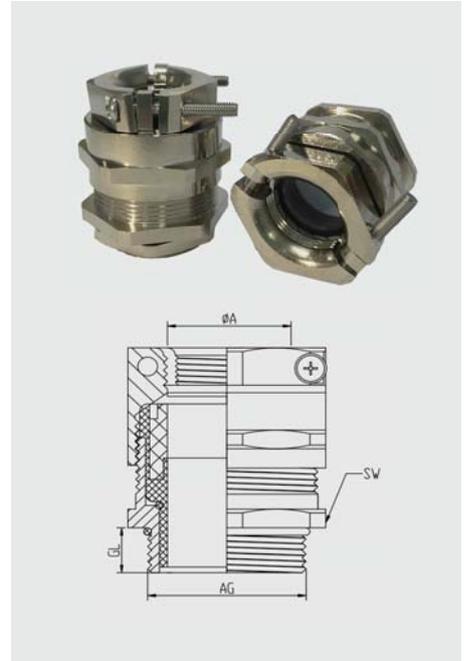

M 螺纹

螺纹 Thread	型号 Part no.	卡口范围 Clamping range	GL	尺寸 Dimension(mm) AG	SW	包装 (个) Packing
M16X1.5	HSM-DL-M16(4-8)	4-8	7.0	16.0	18.0	50
M16X1.5	HSM-DL-M16(4-8)	5-10	7.0	16.0	20.0	50
M20X1.5	HSM-DL-M20(6-12)	6-12	7.5	20.0	22.0	50
M25X1.5	HSM-DL-M25(10-16)	10-16	8.0	25.0	27.0	25
M25X1.5	HSM-DL-M25(13-18)	13-18	8.0	25.0	30.0	25
M32X1.5	HSM-DL-M32(16-22)	16-22	8.5	32.0	35.0	20
M32X1.5	HSM-DL-M32(18-25)	18-25	8.5	32.0	40.0	20
M40X1.5	HSM-DL-M40(22-32)	22-32	12.0	40.0	50.0	20
M50X1.5	HSM-DL-M50(32-38)	32-38	12.0	50.0	57.0	10

PG 螺纹

螺纹 Thread	型号 Part no.	卡口范围 Clamping range	GL	尺寸 Dimension(mm) AG	SW	包装 (个) Packing
PG9	HSM-DL-PG9(4-8)	4-8	7.0	15.2	18.0	50
PG11	HSM-DL-PG11(5-10)	5-10	7.0	18.6	22.0	50
PG13.5	HSM-DL-PG13.5(6-12)	6-12	8.0	20.4	24.0	50
PG16	HSM-DL-PG16(10-14)	10-14	7.5	22.5	27.0	50
PG21	HSM-DL-PG21(13-18)	13-18	8.0	28.3	30.0	20
PG29	HSM-DL-PG29(18-25)	18-25	9.0	37.0	40.0	20
PG36	HSM-DL-PG36(22-32)	22-32	10.0	47.0	52.0	20
PG42	HSM-DL-PG42(32-38)	32-38	11.0	54.0	59.0	10