

普通热缩管

Heat-shrinkable tube(normal wall)

材质：聚乙烯

Material: Polyethylene

颜色：黑色

Colour: Black

温度：-55°C~+125°C

Temperature range: -55°C~+125°C

起始收缩温度：70°C, 完全收缩 110°C

Start shrunk temperature: 70°C, complete contraction at 110°C

纵向收缩比率：5%

收缩比例：2:1

Longitudinal shrinkage: 5%


Shrinking ration: 2:1

阻燃等级：VW-1

Flame- retardant: VW-1`

特性：热收缩套管（PRS）是一种新式的环保无卤阻燃型套管，产品物美价廉，能为电线、电缆和电线端子提供绝缘保护。具有低温收缩、柔软阻燃、绝缘防蚀等特点。广泛应用于各种线束、焊点、电感的绝缘保护盒金属管、棒的防锈、防蚀等。

Properties: PRS is a newly developed environment friendly flame retardant heat-shrinkable tube, using modified polymers and cross-linked by electronic accelerator. It offers an economic and efficient solution for the insulation and protection of cable splices and terminals.

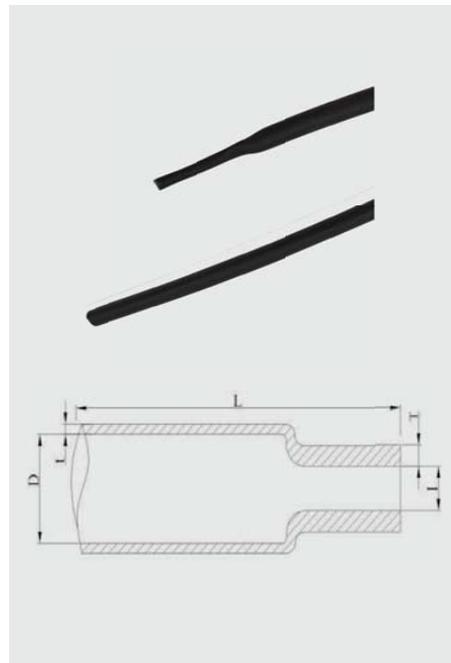

型号 Part no.	收缩前 before shrink		收缩后 after shrink		包装 (米 / 卷) Packing
	内径 D(mm) inside diameter	壁厚 T(mm) wall thickness	最大内径 T(mm) Maximum Inner Diameter	壁厚 T(mm) wall thickness	
PRS-0.6	0.90	0.10	0.40	0.22	200
PRS-0.8	1.00	0.15	0.50	0.22	200
PRS-1.0	1.50	0.15	0.65	0.28	200
PRS-1.5	2.00	0.18	0.85	0.32	200
PRS-2.0	2.50	0.18	1.00	0.35	200
PRS-2.5	3.00	0.18	1.30	0.38	200
PRS-3.0	3.50	0.18	1.50	0.40	200
PRS-3.5	4.00	0.22	1.80	0.42	200
PRS-4.0	4.50	0.25	2.00	0.45	200
PRS-4.5	5.00	0.25	2.30	0.50	100
PRS-5.0	5.50	0.25	2.50	0.55	100
PRS-6.0	6.50	0.28	3.00	0.55	100
PRS-7.0	7.50	0.28	3.50	0.55	100
PRS-8.0	8.50	0.28	4.00	0.60	100
PRS-9.0	9.50	0.30	4.50	0.60	100
PRS-10	10.50	0.30	5.00	0.60	100