

内胶外纤玻纤管

Silicone fiberglass sleeving (outer glass fiber and inner silicone)

材质：网管材质：玻璃纤维，涂层材质：硅胶

Material: outer glass fiber and inner silicone

颜色：白色

Colour: White

温度：-60°C~+200°C

Temperature range: -60°C~+200°C

耐电压等级：7.0kV


Breakdown voltage: 7.0kV

阻燃等级：VW-1

Flammability: VW-1

特性：内胶外纤玻璃纤维套管（NWB）是由硅橡胶经高温过程使用完全硫化定型，并经无碱玻璃纤维编织包覆，再涂浸特殊凡立水后，经温度烘干定型而制成。产品具有耐热性、耐腐蚀性、抗老化性、柔软性等特点，并且能起到良好的绝缘耐高压的作用。

Properties: NWB is coated by silicone with the process of thermal and vulcanization that possesses good properties of dielectric high temperature resistance and cold resistance. It also provides abrasion and flame resistance with high flexibility.

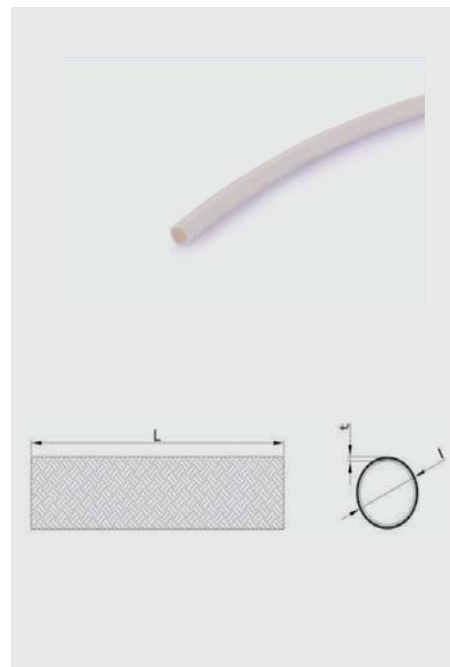

型号 Part no.	内径 I.D.(mm) inside diameter	壁厚 (T) wall thickness	包装 (米/卷) Packing
NWB-01	1	0.65	100
NWB-01.5	1.5	0.65	100
NWB-02	2	0.65	100
NWB-02.5	2.5	0.65	100
NWB-03	3	0.65	100
NWB-03.5	3.5	0.65	100
NWB-04	4	0.65	100
NWB-04.5	4.5	0.65	100
NWB-05	5	0.85	100
NWB-05.5	5.5	0.85	100
NWB-06	6	0.85	100
NWB-07	7	1.15	100
NWB-08	8	1.15	50
NWB-10	10	1.25	50
NWB-12	12	1.5	50